

Распределители ARON СЕТОР 5 / NG10 XQP.5

Технические характеристики

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	

Единый адрес для всех регионов: any@nt-rt.ru || www.aron.nt-rt.ru



XQP.5...

"D19P" PROPORT. SOLENOIDS CH. VIII PAGE 17

REM.S.RA... CH. IX PAGE 4

ORDERING CODE

XQP

Open loop 2/3 way
proportional compensated
flow regulator

5

CETOP 5/NG10

C

2/3 way compensation
with priority function

3

3 way version (standard)
For to obtain 2-way version the P line
must be closed on the subplate

Nominal flow rates
E = 45 l/min
F = 75 l/min
G = 105 l/min

S = without decompression
D = with decompression

Voltage
F = 12V DC
G = 24V DC

00 = No variant
V1 = Viton

1


Serial No.

XQP.5. OPEN LOOP 2/3 WAY PROPORTIONAL PRESSURE COMPENSATED FLOW REGULATORS CETOP 5

The open loop proportional flow regulator is 2 and 3 way compensated with priority function. It is designed to regulate flow in proportion to an applied electrical current (REM power amplifier). Flow regulation is load independent - B port. Load compensation is achieved by a spool compensator which holds the pressure drop constant across the proportional spool.

Valves are available in the following versions (see hydraulic symbol):



- 2 way pressure compensated
- 3 way pressure compensated with priority function.
- 3 way pressure compensated with priority and venting function.



• In order to obtain the 2 way pressure compensated version the cavities P and T have be closed on the subplate.

SYMBOLS HYDRAULIC


SIMPLIFIED TYPE




• In order to obtain the 3 way pressure compensated version the cavities T have be closed on the subplate.

DIAGRAMS

**ΔP - FLOW RATE A → B
(WITH 5 l/min TO P)**

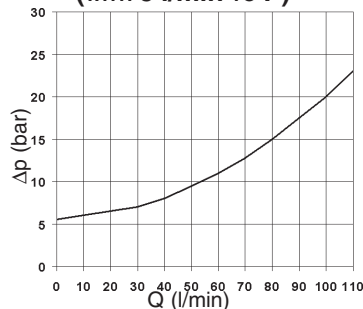


**ΔP - SECONDARY LINE FLOW
(A → P FREE)**

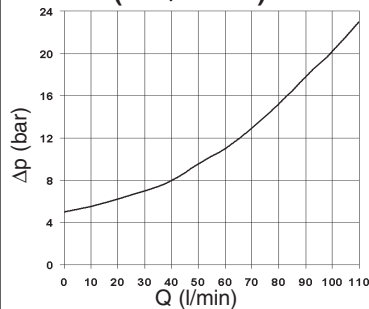


FLOW RATE

BACK PRESSURE ON PRIORITY LINE

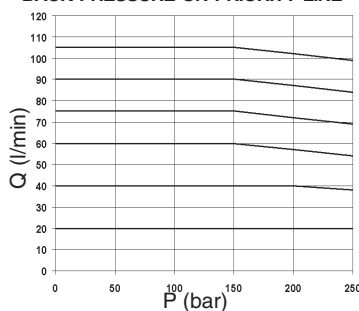


FLOW RATE


BACK PRESSURE ON SECONDARY LINE

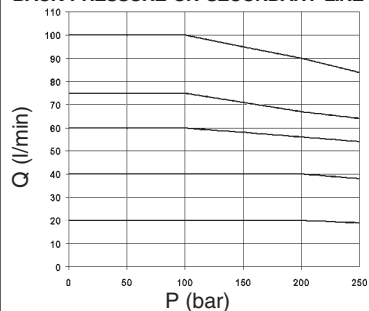


**INPUT SIGNAL
FLOW**

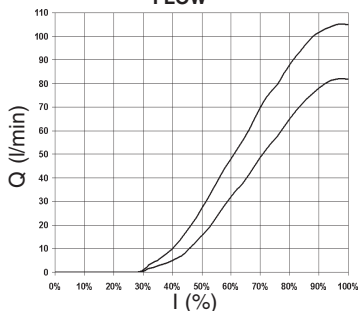

**2 WAY PRESSURE COMPENSATED
(A 270 bar - B VARIABLE)**

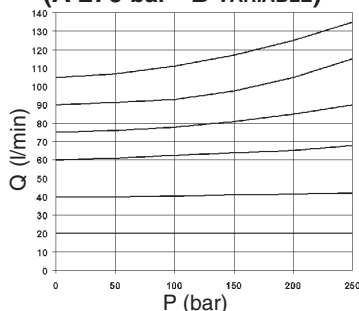

**2 WAY PRESSURE COMPENSATED
(A VARIABLE - B 30 bar)**

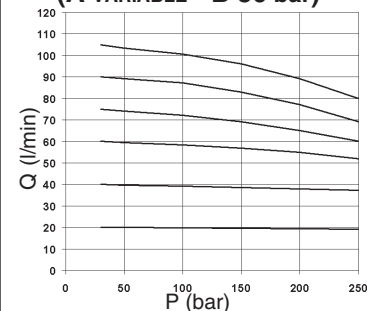

The fluid used is a mineral based oil with a viscosity of 46 mm²/s at 40°C.
The tests have been carried out at with a fluid of a 40°C.

XQP.5. OPEN LOOP 2/3 WAY PROPORTIONAL PRESSURE COMPENSATED FLOW REGULATORS CETOP 5

OPERATING SPECIFICATIONS

Max. operating pressure ports A/B /P (with T ports closed on the subplate)	250 bar
Regulated flow rate	75 / 105 l/min
Decompression drain flow	max 0,7 l/min
Relative duty cycle	Continuous 100% ED
Type of protection (in relation to the connector used)	IP 65
Flow rate gain	See diagram "Input signal flow"
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-20°C ÷ 75°C
Ambient temperature	-20°C ÷ 60°C
Max. contamination level	from class 7 to 9 in accordance with NAS 1638 with filter $\beta_{10} \geq 75$
Weight	4,97 Kg

Type of voltage	12V	24V
Max. current	2.5 A	1.25 A
Solenoid coil resistance at 20°C (68°F)	2.85 Ohm	11.4 Ohm
Hysteresis with Δp 7 bar	<5%	<8%
Response to step $\Delta p = 7$ bar (P/A)		
0 ÷ 100%	~ 65 ms	-
100% ÷ 0	~ 30 ms	-
Frequency response -3db (Input signal 50% ± 25% Vmax.)	7Hz	-

AMPLIFIER UNIT AND CONTROL

REM.S.RA.*...

Electronic regulator for control single proportional solenoid valve


Operating specifications are valid for fluids with 46 mm²/s viscosity at 40°C, using specified ARON electronic control units.

Performance data are carried out using the specified Aron power amplifier type REM.S.RA... power supplied at 24V.


OVERALL DIMENSIONS

E = Manual override

GSQ = Square section seal

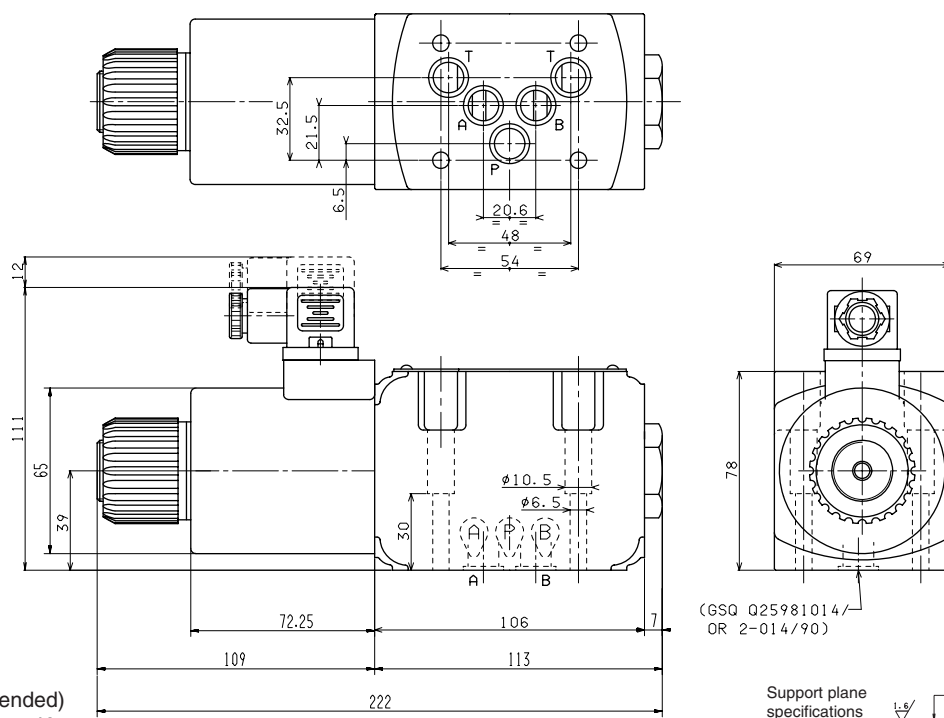

Fixing screws UNI 5931 M6x40
(12.9 material screws are recommended)
Tightening torque 8 ÷ 10 Nm / 0.8 ÷ 1 Kgm



"D19P" PROPORTIONAL SOLENOIDS

Type of protection (in relation to connector used)	IP 65
Ambient temperature	-54°C ÷ 60°C
Duty cycle	100% ED
Insulation class	H
Weight	1,58 Kg

ETD19P - 01/2002/e

Архангельск (8182)63-90-72	Ижевск (3412)26-03-58	Магнитогорск (3519)55-03-13	Пермь (342)205-81-47	Сургут (3462)77-98-35
Астана (7172)727-132	Иркутск (395)279-98-46	Москва (495)268-04-70	Ростов-на-Дону (863)308-18-15	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Казань (843)206-01-48	Мурманск (8152)59-64-93	Рязань (4912)46-61-64	Томск (3822)98-41-53
Барнаул (3852)73-04-60	Калининград (4012)72-03-81	Набережные Челны (8552)20-53-41	Самара (846)206-03-16	Тула (4872)74-02-29
Белгород (4722)40-23-64	Калуга (4842)92-23-67	Нижний Новгород (831)429-08-12	Санкт-Петербург (812)309-46-40	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Кемерово (3842)65-04-62	Новокузнецк (3843)20-46-81	Саратов (845)249-38-78	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Киров (8332)68-02-04	Новосибирск (383)227-86-73	Севастополь (8692)22-31-93	Уфа (347)229-48-12
Волгоград (844)278-03-48	Краснодар (861)203-40-90	Омск (3812)21-46-40	Симферополь (3652)67-13-56	Хабаровск (4212)92-98-04
Вологда (8172)26-41-59	Красноярск (391)204-63-61	Орел (4862)44-53-42	Смоленск (4812)29-41-54	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Курск (4712)77-13-04	Оренбург (3532)37-68-04	Сочи (862)225-72-31	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Липецк (4742)52-20-81	Пенза (8412)22-31-16	Ставрополь (8652)20-65-13	Ярославль (4852)69-52-93
Иваново (4932)77-34-06	Киргизия (996)312-96-26-47	Казахстан (772)734-952-31	Таджикистан (992)427-82-92-69	